



# Terminal Blocks entrelec® according to NF F 61017 and IEC 60947-7

Quick-connect

A  
4

## Contents

Quick-connect Terminal Blocks with Longitudinal Tabs, without Cover .....	46
Quick-connect Terminal Blocks with Longitudinal Tabs, with Cover .....	49
Quick-connect Terminal Blocks with Fuse Holder .....	50
Quick-connect Terminal Blocks - Component Holder .....	51
Quick-connect Terminal Blocks with Removable Component Holder .....	53




**NFF 61017 / IEC 60947-7**



# Terminal block with longitudinal quick connect tabs

Assembled without cover

DIN 3 - reinforced rail type 2

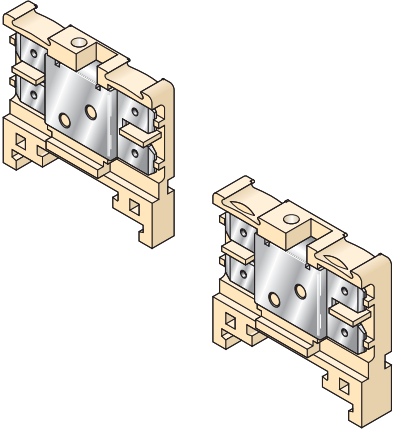


End stop		th. 10 mm	BAM2	V0	1SNA 296 351 R0000
End stop		th. 10,7 mm	BAH24		1SNA 168 355 R1300
Rail		35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	PR5		1SNA 168 700 R2200
Rail		21,8 x 8,2 x 1,5	PRH2R		1SNA 163 350 R1500

Other end stops, rails and accessories : see section on accessories.

## Notes

### HD 2,5/6.2G.2G.1

Spacing 6 mm (or 7 mm with end section)



1 terminal block with 4 tabs for 6,3 x 0,8 mm (.248" x .031") quick connect with possible testing and transverse connection.



Color	Type	Part numbers
Beige V0	HD 2,5/6.2G.2G.1	1SNA 160 487 R2500
NF F 61017	BB 0006-2G2G	1SNA 160 487 R2500
NF F 61017	BB 0007-2G2G	1SNA 160 487 R2500 + FEH3

### Characteristics

Wire size	NFC			DIN			NF F		
							61-017		
Quick-connect	6,3 x 0,8 mm (serie 250) - 2,5 mm <sup>2</sup> max.								

### Rated voltage

V AC	250 Cat. C	125 Gr. C	250
V DC	250 Cat. C	150 Gr. C	250

### Rated current


Rated	20/25 A	26 A	20 A
Rated	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>

### Wire size

Weight	Protection
7 g 0,25 oz	IP 20 NEMA 1

### HD 6/8.2G.2G.1

Spacing 8 mm (or 9 mm with end section)



1 terminal block with 4 tabs for 6,3 x 0,8 mm (.248" x .031") quick connect with possible testing and transverse connection.



Color	Type	Part numbers
Beige V0	HD 6/8.2G.2G.1	1SNA 160 606 R1400
NF F 61017	BB 0008-2G2G	1SNA 160 606 R1400
NF F 61017	BB 0009-2G2G	1SNA 160 606 R1400 + FEH3

### Characteristics

Wire size	NFC			DIN			NF F		
							61-017		
Quick-connect	6,3 x 0,8 mm (serie 250) - 6 mm <sup>2</sup> max.								

### Rated voltage

V AC	250	250 Gr. C (2)	250
V DC	250	300 Gr. C (2)	250


### Rated current

Rated	20/25 A	26 A	20
Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>	6 mm <sup>2</sup>

### Wire size

Weight	Protection
8 g 0,28 oz	IP 20 NEMA 1

## Accessories

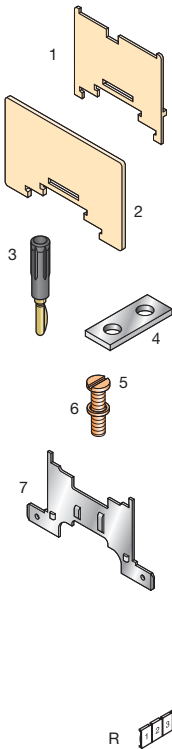

- End section
- Circuit separator
- Test plug
- Jumper bar
- Screw for BJH
- Washer for VSJ
- Shield connector

R See section on markers marking method

## Accessories

Type	Part numbers
FEH3 th. 1 mm	1SNA 198 352 R0700
SCH3 th. 1,6 mm	1SNA 198 692 R2500
FC2 DIA. 2 mm	1SNA 007 865 R2600
BJH6 (1) spacing 6 mm	
2 poles	1SNA 168 481 R2300
3 poles	1SNA 168 482 R2400
4 poles	1SNA 168 483 R2500
5 poles	1SNA 168 484 R2600
10 poles	1SNA 168 485 R2700
BJH7 (1) spacing 7 mm	
2 poles	1SNA 168 486 R2000
3 poles	1SNA 168 487 R2100
4 poles	1SNA 168 488 R0200
5 poles	1SNA 168 489 R0300
10 poles	1SNA 168 490 R0000
VSJ6	1SNA 167 735 R2700
RDJ6	1SNA 173 241 R0600
EBHD th. 1,6 mm	1SNA 168 353 R1100

## Accessories

Type	Part numbers
FEH3 th. 1 mm	1SNA 198 352 R0700
SCH3 th. 1,6 mm	1SNA 198 692 R2500
FC2 DIA. 2 mm	1SNA 007 865 R2600
BJH8 (1) spacing 8 mm	
2 poles	1SNA 168 456 R0100
3 poles	1SNA 168 457 R0200
4 poles	1SNA 168 458 R1300
5 poles	1SNA 168 459 R1400
10 poles	1SNA 168 356 R1400
BJH9 (1) spacing 9 mm	
2 poles	1SNA 168 460 R1100
3 poles	1SNA 168 461 R0600
4 poles	1SNA 168 462 R0700
5 poles	1SNA 168 463 R0000
10 poles	1SNA 168 357 R1500
VSJ6	1SNA 167 735 R2700
RDJ6	1SNA 173 241 R0600
EBHD th. 1,6 mm	1SNA 168 353 R1100

RC 610


RC 610 RC 810


(1) Use of these accessories requires the cut out of the block body (precut).







(2) Values given for 8 mm spacing. Values for 9 mm spacing : DIN Gr C : 380 V~ 450 V~, NFC Cat.C : 400 V~ 250 V=

# Terminal block with vertical and longitudinal quick connect tabs

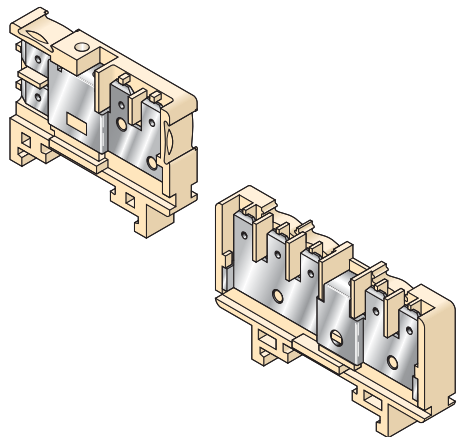Assembled without cover

 DIN 3 - reinforced rail type 2




End stop		th. 10 mm	BAM2	V0	1SNA 296 351 R0000
End stop		th. 10,7 mm	BAH24		1SNA 168 355 R1300
Rail		35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	PR5		1SNA 168 700 R2200
Rail		21,8 x 8,2 x 1,5	PRH2R		1SNA 163 350 R1500

Other end stops, rails and accessories : see section on accessories.

## Notes

## Accessories

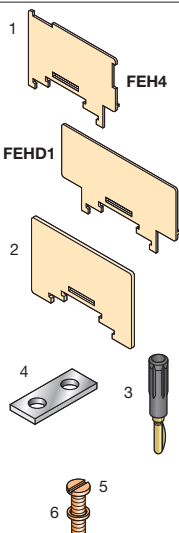


- End section
- Circuit separator
- Test plug
- Jumper bar
- Screw for BJS
- Washer for VSJ6

R See section on markers marking method


## HD 6/8.2G.2G.2

Spacing 8 mm (.315") or 9 mm (.354") with end section



1 terminal block with 4 tabs for 6.3 x 0.8 mm (.248" x .031") quick connect with possible testing and transverse connection.



Color	Type	Part numbers
Beige	 HD 6/8.2G.2G.2	1SNA 160 619 R1000
NF F 61017	BB 0008-2G2G	1SNA 160 619 R1000
NF F 61017	BB 0009-2G2G	1SNA 160 619 R1000 + FEH4

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 6 mm <sup>2</sup> max.	

### Rated voltage

V AC	380 Gr. C	380	400 Cat. C
V DC	450 Gr. C	380	250 Cat. C

### Rated current


Rated	26	20	20/25
-------	----	----	-------

### Wire size

Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Weight	9 g	0,32 oz
Protection	IP 20 raccordé NEMA 1 connected	


## HD 6/9.5G

Spacing 9 mm (.354")

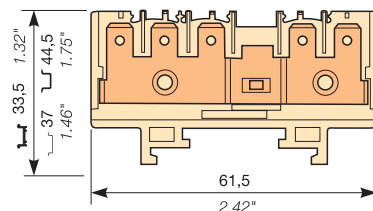

1 circuit. 1 terminal block with 5 tabs for 6.3 x 0.8 mm (.248" x .031") quick connect with possible testing and transverse connection.



Color	Type	Part numbers
Beige	 HD 6/9.5G	1SNA 160 621 R0200
NF F 61017	BC 0009-3G2G	1SNA 160 621 R0200

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 6 mm <sup>2</sup> max.	

### Rated voltage

V AC	380 Gr. C	380	400 Cat. C
V DC	450 Gr. C	380	250 Cat. C

### Rated current

Rated	26	20	20/25
-------	----	----	-------

### Wire size

Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Weight	13 g	0,46 oz
Protection	IP 20 raccordé NEMA 1 connected	

Type	Part numbers
FEH4 th. 1 mm	1SNA 193 878 R2200
SCH3 th. 1,6 mm	1SNA 198 692 R2500
FC2 DIA. 2 mm	1SNA 007 865 R2600
BJH8 (1) spacing 8 mm	
2 poles	1SNA 168 456 R0100
3 poles	1SNA 168 457 R0200
4 poles	1SNA 168 458 R1300
5 poles	1SNA 168 459 R1400
10 poles	1SNA 168 356 R1400
BJH9 (1) spacing 9 mm	
2 poles	1SNA 168 460 R1100
3 poles	1SNA 168 461 R0600
4 poles	1SNA 168 462 R0700
5 poles	1SNA 168 463 R0000
10 poles	1SNA 168 357 R1500
VSJ6	1SNA 167 735 R2700
RDJ6	1SNA 173 241 R0600

Type	Part numbers
FEHD1 th. 1 mm	1SNA 199 400 R0600
FC2 DIA. 2 mm	1SNA 007 865 R2600
BJH9 (1) spacing 9 mm	
2 poles	1SNA 168 460 R1100
3 poles	1SNA 168 461 R0600
4 poles	1SNA 168 462 R0700
5 poles	1SNA 168 463 R0000
10 poles	1SNA 168 357 R1500
VSJ6	1SNA 167 735 R2700
RDJ6	1SNA 173 241 R0600


RC 610 RC 810


RC510 only







(1) Use of these accessories requires the cut out of the block body (precut).

## Terminal block with vertical quick connect tabs
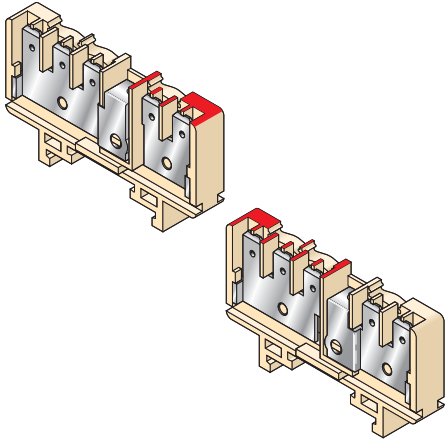
### Assembled without cover

 **DIN 3 - reinforced rail type 2**




End stop		th. 10 mm	<b>BAM2</b>	V0	1SNA 296 351 R0000
End stop		th. 10,7 mm	<b>BAH24</b>		1SNA 168 355 R1300
Rail		35 x 7,5 x 1	<b>PR3.Z2</b>		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	<b>PR4</b>		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	<b>PR5</b>		1SNA 168 700 R2200
Rail		21,8 x 8,2 x 1,5	<b>PRH2R</b>		1SNA 163 350 R1500

Other end stops, rails and accessories : see section on accessories.

### Notes

### Accessories




- End section
- Test plug
- Jumper bar

- Screw for **BJS**
- Washer for **VSJ6**

**R** See section on markers marking method


## HD 6/9.3G.2G

Spacing 9 mm (.354")

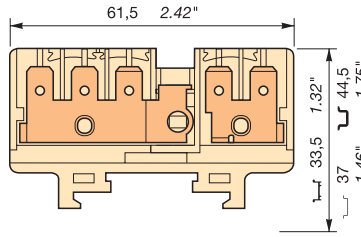

2 circuits. 1 terminal block with 3 tabs for 6.3 x 0.8 mm (.248" x .031") quick connect with possible testing and transverse connection. 1 terminal block with 2 tabs for 6.3 x 0.8 mm (.248" x .031") quick connect, marked in red.

**SNEIF RATP**  
NF F 61017 NF F 61017

Color	Type	Part numbers
Beige 	<b>HD 6/9.3G.2G</b>	1SNA 160 563 R0000
NF F 61017	<b>BK 0009-3Ge/2G</b>	

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 6 mm <sup>2</sup> max.	


Rated voltage			
V AC	380 Gr. C	380	400 Cat. C
V DC	450 Gr. C	380	250 Cat. C
Pollution degree			

Rated current			
Rated	26	20	20/25

Wire size			
Rated	6 mm <sup>2</sup>		6 mm <sup>2</sup>
Weight			Protection
13 g 0,46 oz			IP 20 raccordé NEMA 1 connected


## HD 6/9.2G.3G

Spacing 9 mm (.354")

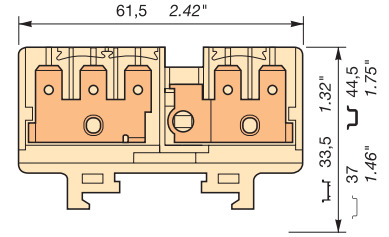

2 circuits. 1 terminal block with 3 tabs for 6.3 x 0.8 mm (.248" x .031") quick connect, marked in red. 1 terminal block with 2 tabs for 6.3 x 0.8 mm (.248" x .031") quick connect, with possible testing and transverse connection.

**SNEIF RATP**  
NF F 61017 NF F 61017

Color	Type	Part numbers
Beige 	<b>HD 6/9.2G.3G</b>	1SNA 160 564 R0100
NF F 61017	<b>BK 0009-3G/2Ge</b>	

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 6 mm <sup>2</sup> max.	

Rated voltage			
V AC	380 Gr. C	380	400 Cat. C
V DC	450 Gr. C	380	250 Cat. C
Pollution degree			

Rated current			
Rated	26	20	20/25

Wire size			
Rated	6 mm <sup>2</sup>		6 mm <sup>2</sup>
Weight			Protection
13 g 0,46 oz			IP 20 raccordé NEMA 1 connected

Type	Part numbers	
FEHD1	th. 1 mm	1SNA 199 400 R0600
FC2	DIA. 2 mm	1SNA 007 865 R2600
BJH9 (1)	spacing 9 mm	
	2 poles	1SNA 168 460 R1100
	3 poles	1SNA 168 461 R0600
	4 poles	1SNA 168 462 R0700
	5 poles	1SNA 168 463 R0000
	10 poles	1SNA 168 357 R1500
VSJ6		1SNA 167 735 R2700
RDJ6		1SNA 173 241 R0600

Type	Part numbers	
FEHD1	th. 1 mm	1SNA 199 400 R0600
FC2	DIA. 2 mm	1SNA 007 865 R2600
BJH9 (1)	spacing 9 mm	
	2 poles	1SNA 168 460 R1100
	3 poles	1SNA 168 461 R0600
	4 poles	1SNA 168 462 R0700
	5 poles	1SNA 168 463 R0000
	10 poles	1SNA 168 357 R1500
VSJ6		1SNA 167 735 R2700
RDJ6		1SNA 173 241 R0600

RC510 only


(1) Use of these accessories requires the cut out of the block body (precut).







RC510 only





# Component holders with tabs


 **DIN 3 - reinforced rail type 2**

End stop		th. 10 mm	<b>BAM2</b>	V0	1SNA 296 351 R0000
End stop		th. 10,7 mm	<b>BAH24</b>		1SNA 168 355 R1300
Rail		35 x 7,5 x 1	<b>PR3.Z2</b>		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	<b>PR4</b>		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	<b>PR5</b>		1SNA 168 700 R2200
Rail		21,8 x 8,2 x 1,5	<b>PRH2R</b>		1SNA 163 350 R1500

Other end stops, rails and accessories : see section on accessories.

## Notes

## Accessories

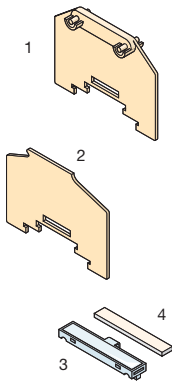


- 1 End section
- 2 Circuit separator
- 3 Terminal board label holder on **FEH**
- 4 Label for **PEFH** (29 x 5 mm)

**R** See section on markers marking method


## HD 6/24.DH

Spacing 25,2 mm (1.01") (spacing 24 mm (.945") + separator 1.2 mm (.047"))

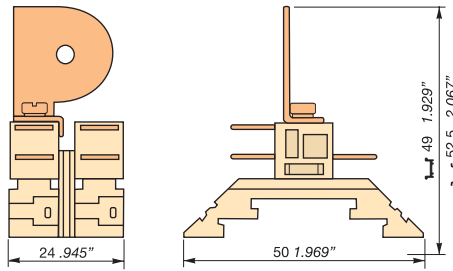

Block for screw and solder diodes type SKNa4 or SKN5. Connection by 6 tabs for quick disconnects 6,3 x 0,8 mm (.248" x .031").



Color	Type	Part numbers
Beige	 <b>HD 6/24.DH</b>	1SNA 399 964 R0600
NF F 61017 <b>BG25,2-2G2G</b> 1SNA 399 964 R0600+SCHD2		

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 2,5 mm <sup>2</sup> max.	


Rated voltage			
V AC	250 Gr. C	250	400 Cat. C
V DC	250 Gr. C	250	250 Cat. C
Pollution degree			
Rated current			
Rated	26 A	16 A	20/25 A
Wire size			
Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Weight			
20 g			
0.71 oz			

Type	Part numbers		
FJHD40	th. 1,5 mm	1SNA 295 424 R1100	
SCHD2	th. 1,2 mm	1SNA 295 429 R2600	
PEFH		1SNA 163 497 R1600	
RPED		1SNA 163 518 R2200	

REH3

## HD 6/24.DH

Spacing 25,2 mm (1.01") (spacing 24 mm (.945") + separator 1.2 mm (.047"))

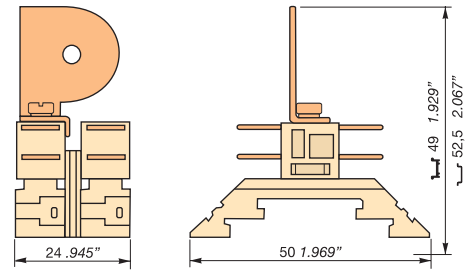

Block for screw and solder diodes type SKNa4 or SKN5. Connection by 8 tabs for quick disconnects 6,3 x 0,8 mm (.248" x .031").



Color	Type	Part numbers
Beige	 <b>HD 6/24.DH</b>	1SNA 399 963 R0500

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 2,5 mm <sup>2</sup> max.	

Rated voltage			
V AC	250 Gr. C	250	400 Cat. C
V DC	250 Gr. C	250	250 Cat. C
Pollution degree			
Rated current			
Rated	26 A	16 A	20/25 A
Wire size			
Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Weight			
20 g			
0.71 oz			

Type	Part numbers		
FJHD40	th. 1,5 mm	1SNA 295 424 R1100	
SCHD2	th. 1,2 mm	1SNA 295 429 R2600	
PEFH		1SNA 163 497 R1600	
RPED		1SNA 163 518 R2200	

REH3




### Component holder with tabs

(outside supply scope)

 DIN 3 - reinforced rail type 2

#### HD 6/14.DH

Spacing 14 mm (.551")

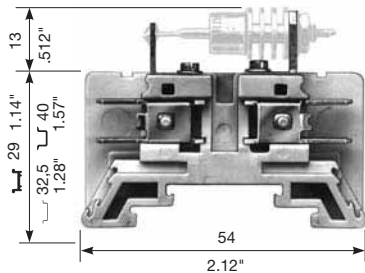

Block for screw and solder diodes type SKN2,5 or SKNa2. Connection by 2 tabs for quick disconnects 6,3 x 0,8 mm (.248" x .031") on each side.



Color	Type	Part numbers
Beige	HD 6/14.DH	1SNA 162 971 R2700
	NF F 61017 BG 0014-2G2G	


#### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 2,5 mm <sup>2</sup> max.	

Rated voltage			
V AC	500 Gr. C	380	500 Cat. C
V DC	600 Gr. C	500	500 Cat. C
Pollution degre			
Rated current			
Rated	26 A	12 A	20/25 A
Wire size			
Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Weight			
17 g			
0.60 oz			

#### HD 6/14.DG

Spacing 14 mm (.551")

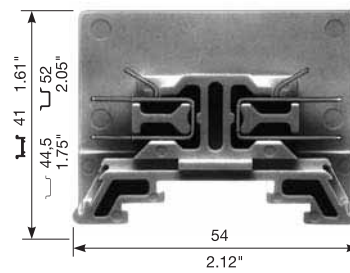

Block for soldered diodes or resistors. Connection by 2 tabs for quick disconnects 6,3 x 0,8 mm (.248" x .031") on each side.









Color	Type	Part numbers
Beige	HD 6/14.DG	1SNA 162 309 R1000
	NF F 61017 BG 0014-2G2G	

#### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 2,5 mm <sup>2</sup> max.	


Rated voltage			
V AC	500 Gr. C	380	500 Cat. C
V DC	600 Gr. C	500	500 Cat. C
Pollution degre			
Rated current			
Rated	26 A	12 A	20/25 A
Wire size			
Rated	6 mm <sup>2</sup>	6 mm <sup>2</sup>	6 mm <sup>2</sup>
Weight			
17 g			
0.60 oz			

End stop		th. 10 mm	BAM2	V0	1SNA 296 351 R0000
End stop		th. 10,7 mm	BAH24		1SNA 168 355 R1300
Rail		35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	PR5		1SNA 168 700 R2200
Rail		21,8 x 8,2 x 1,5	PRH2R		1SNA 163 350 R1500

Other end stops, rails and accessories : see section on accessories.

### Notes

### Accessories

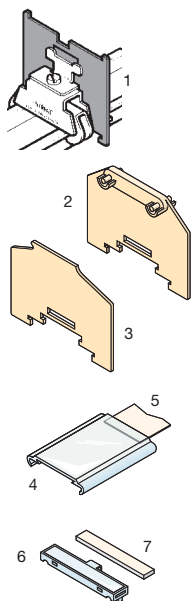

- End section
- Intermediate section
- Circuit separator
- Clear cover
- Transverse marking for cover
- Terminal board level holder on FEH
- Label for PEFH (29 x 5 mm)

R See section on markers marking method

### Accessories

Type	Part numbers
FEH9	th. 1,6 mm 1SNA 198 549 R0500
FJH501	th. 1,5 mm 1SNA 199 411 R1400
SCH8	th. 1,2 mm 1SNA 199 412 R1500
CPM	1SNA 187 312 R1400
CPM	1SNA 197 312 R1600
RTC	1SNA 163 156 R2700

RC610 REH3

### Accessories

Type	Part numbers
FEH8	th. 1,5 mm 1SNA 198 729 R0100
FJH501	th. 1,5 mm 1SNA 199 411 R1400
SCH8	th. 1,2 mm 1SNA 199 412 R1500
CPM	1SNA 187 312 R1400
CPM	1SNA 197 312 R1600
RTC	1SNA 163 156 R2700
PEFH	1SNA 163 497 R1600
RPED	1SNA 163 518 R2200







RC610 REH3



## Removable component holder with tabs (outside supply scope)

 **DIN 3 - reinforced rail type 2**




End stop		th. 10 mm	<b>BAM2</b>	V0	1SNA 296 351 R0000
End stop		th. 10,7 mm	<b>BAH24</b>		1SNA 168 355 R1300
Rail		35 x 7,5 x 1	<b>PR3.Z2</b>		1SNA 174 300 R1700
Rail		35 x 15 x 2,3	<b>PR4</b>		1SNA 168 500 R1200
Rail		35 x 15 x 1,5	<b>PR5</b>		1SNA 168 700 R2200
Rail		21,8 x 8,2 x 1,5	<b>PRH2R</b>		1SNA 163 350 R1500

Other end stops, rails and accessories : see section on accessories.

### Notes

### Accessories

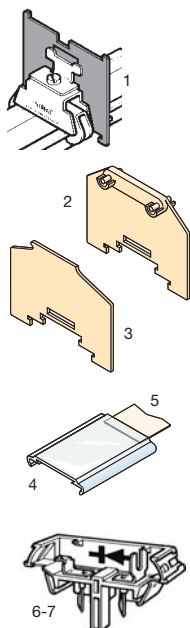


- 1 End section
- 2 Intermediate section
- 3 Circuit separator
- 4 Clear cover Cover
- 5 Transverse marking for cover
- 6 Plug for diode screw and solder tag
- 7 Plug with solder tag

**R** See section on markers marking method

### HD 6/14.SDH.1

Spacing 14 mm (.551")

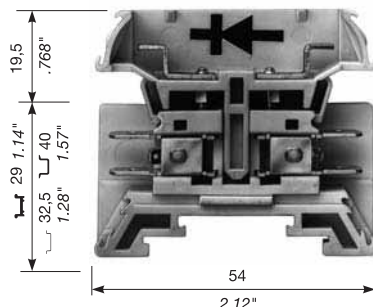

Connection interruptible by plugs. For screw and solder diodes. Connection by 2 tabs for quick disconnects 6,3 x 0,8 mm (.248" x .031") on each side.

**SNEF RATP**  
NF F 61017 NF F 61017

Color	Type	Part numbers
Beige (with plug)	<b>HD 6/14.SDH.1</b>	1SNA 162 988 R2100
NF F 61017	<b>BH 0014-2G2G</b>	

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 6 mm <sup>2</sup> max.	


Rated voltage			
V AC	500 Gr. C	380	500 Cat. C
V DC	600 Gr. C	500	500 Cat. C
Pollution degre			
Pollution degre			
Rated current			
Rated	26 A	16 A	20/25 A
Wire size			
Rated	6 mm <sup>2</sup>		6 mm <sup>2</sup>
Weight			
30 g			
1.06 oz			

Type	Part numbers
FEH9	th. 1,6 mm 1SNA 198 549 R0500
FJH501	th. 1,5 mm 1SNA 199 411 R1400
SCH8	th. 1,2 mm 1SNA 199 412 R1500
CPM	1SNA 187 312 R1400
CPM	1SNA 197 312 R1600
RTC	1SNA 163 156 R2700
BNHD.VS	1SNA 168 621 R0600
BNHD.S	1SNA 168 957 R0700
RC610	REH3

### HD 6/14.SDH

### HD 6/14.SDH.2

Spacing 14 mm (.551")

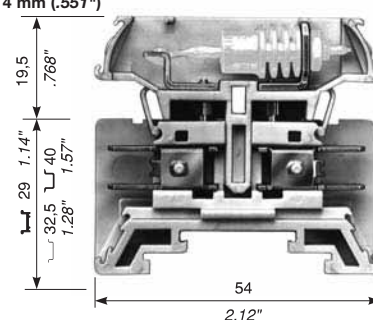

Connection interruptible by plugs. For screw and solder diodes type SKN2,5 or SKNa2. Connection by 2 tabs for quick disconnects 6,3 x 0,8 mm (.248" x .031") on each side.

**SNEF RATP**  
NF F 61017 NF F 61017

Color	Type	Part numbers
Beige (with plug)	<b>HD 6/14.SDH</b>	1SNA 162 972 R2000
NF F 61017	<b>BH 0014-2G2G</b>	
Beige (without plug)	<b>HD 6/14.SDH2</b>	1SNA 162 993 R1600

### Characteristics

Wire size	DIN-VDE	NF F 61017	NFC-UTE
	Quick-connect	6,3 x 0,8 mm (series 250) - 6 mm <sup>2</sup> max.	

Rated voltage			
V AC	500 Gr. C	380	500 Cat. C
V DC	600 Gr. C	500	500 Cat. C
Pollution degre			
Pollution degre			
Rated current			
Rated	26 A	16 A	20/25 A
Wire size			
Rated	6 mm <sup>2</sup>		6 mm <sup>2</sup>
Weight			
30 g			
1.06 oz			

Type	Part numbers
FEH9	th. 1,6 mm 1SNA 198 549 R0500
FJH501	th. 1,5 mm 1SNA 199 411 R1400
SCH8	th. 1,2 mm 1SNA 199 412 R1500
CPM	1SNA 187 312 R1400
CPM	1SNA 197 312 R1600
RTC	1SNA 163 156 R2700
BNHD.VS	1SNA 168 621 R0600
BNHD.S	1SNA 168 957 R0700
RC610	REH3